

www.Kama-Labs.com

(Assembly instructions and latest firmware you can find on my website)

YANA

Assembled my own hands 😊

Thanks for purchase!!!

Features:

- * 6 **IN-16** Russian NIXIE tubes (made in 1970-80)
- * 2 IN-3 NIXIE separators (show am/pm and on/off of alarm)
 - * 32bit STM32F100C8 processor
 - * 15 parameters
 - * 12/24 hours mode
 - * 1 Alarm
- * Turn off at night (increase lifetime of tubes in twice!)
 - * Turn off leading zero
 - * Smooth PCB routing
- * Countdown timer 99days:23hour:59mins:59sec
 - * Full remote control
 - * Anti-cathode poisoning system
 - * USB connection to PC (for update firmware)
- * Double **Multicolour** led glow (independent random color leds and **RGB** leds under each tube)
 - * Adjustable brightness of **RGB** and AUTO leds
- * **RGB** led (6 colors of backlight or autochange color mode)
 - * Adjustable high-voltage block. 150-190 volts.
 - * 10 modes of switch digits
 - * 2 modes of separator tubes
 - * **IN-16** tubes works in static mode
 - * 6 Russian chips K155ID1 in sockets

* Thermometer

* Correction of temperature

* Accurate to +/- 1 minute/year

* Setup of clock accuracy

* Date in format DD.MM.YY or MM.DD.YY

* Backup battery. Data is not lost when power off

* 3 button - Time, Alarm, Color.

* Power source - DC 12V barrel plug 5.5mm/2.1mm ("+" inside, "-" outside)

* Consuming current - no more 500mA

* Height of pcb with elements only 13 mm

* Noiseless work

Dimensions of the clock - 161mm x 58mm x 66mm.

Dimensions of the clock in plastic case - 171mm x 68mm x 90mm.

DANGER! HIGH VOLTAGE! (~165 volts)

No	Parameter	Value
1	12/24 time format	0 - 12h time format 1 - 24h time format
2	Hi.Hour tube fading	0 - disable fading 1 - enable
3	Show time mode	0 - hard mode 1 - soft mode №1 2 - soft mode №2 3 - random mode №1 4 - random mode №2 5 - slot machine 6 - wave 7 - fade one by one 8 - shift 9 - run 10 - all effects one by one
4	Backlight mode	0 - all leds off 1..5 - brightness 6 - AUTO brightness 7 - AUTO brightness + turn off at night 8 - turn off at night
5	Show current temperature	0 - disable 1 - every 2 minutes 2 - every 5 minutes

6	Work of separators	0 - disable 1 - work together 2 - work alternately																				
7	Show current date	0 - off 1 - every 2 minutes 2 - every 5 minutes																				
8	Correction of temperature coefficient	0 .. 9 Current temp. - temp.coeff. = real temperature <table border="1" data-bbox="746 568 1497 1061"> <thead> <tr> <th>Temp.coeff</th> <th>Current temp.</th> </tr> </thead> <tbody> <tr><td>0</td><td>0</td></tr> <tr><td>1</td><td>-1</td></tr> <tr><td>.</td><td>.</td></tr> <tr><td>.</td><td>..</td></tr> <tr><td>10</td><td>-10</td></tr> <tr><td>11</td><td>+1</td></tr> <tr><td>.</td><td>.</td></tr> <tr><td>.</td><td>.</td></tr> <tr><td>19</td><td>+10</td></tr> </tbody> </table>	Temp.coeff	Current temp.	0	0	1	-1	10	-10	11	+1	19	+10
Temp.coeff	Current temp.																					
0	0																					
1	-1																					
.	.																					
.	..																					
10	-10																					
11	+1																					
.	.																					
.	.																					
19	+10																					
9	Clock accuracy correction	0 .. 9 Bigger value - slowly clock																				
10	Date format	0 - DD.MM.YY 1 - MM.DD.YY																				
11	Temperature format	0 - Celsius 1 - Fahrenheit																				
12	Brightness of BOTTOM LEDs	0 .. 6																				
13	Firmware type	0 - for IN-14, IN-4, IN-16, IN-8 and IN-18 nixie clocks 1 - for IV-9 Numitron clock																				
14	Anti-cathode poisoning For NIXIE clocks only	0 - Off 1 - Every 1 minute 2 - Every 5 minutes 3 - Every 10 minutes																				
15	Night fading	0 - Off 1 - On																				

Button function:

Short click = ~0.5 sec.

Long click = ~1 sec

First button - Time: Short click - on/off alarm (indicates by KM separators tubes) Long click - time setup

Second button - Alarm: Short click - parameters mode Long click - alarm setup

Third button - Color: Short click - change color of backlight or disable leds Long click - date setup

If you will press and hold one button and then will press second:

1 + 2 = show current temperature

1 + 3 = show current date

2 + 3 = test mode for checking nixie tubes

3 + 1 = show countdown timer

How to set time?

- 1) Press and hold 1 button ~1 sec
- 2) Hours tubes start to blink
- 3) Press 1 button for increment value and 2 button for decrement value
- 4) Press 3 button for go to next value
- 6) Seconds will reset to "00" if you will press 1 or 2 button
- 7) Press 3 button for exit from setting time mode

How to set alarm?

Similarly. However, use 2 button for enter into setting mode (press and hold ~1 sec).

How to change parameters?

- 1) Press 2 button for enter into parameters mode
- 2) You will see number of parameter (1) and value of parameter (0):
1_ : _ _ : _ 0

3) Press **1 button** for increment value and **2 button** for decrement value

4) Press **3 button** for go to next parameter

How to set current date?

1) Press and hold **3 button** for 1 sec

2) You will see date in DD.MM.YY format

3) Press **1 button** for increment value and **2 button** for decrement value of days in month

4) Press **3 button** again for set the month and year

How to change color of backlight?

Press **3 button** to change color or to set autochange color.

How to set countdown timer?

Press **3 + 1** for show countdown timer. Here buttons have next function:

1 - Short click – on/off timer

Long click – exit

2 - Short click – DD:HH:MM or HH:MM:SS time format

Long click – timer setup

3 - Short click – reset to previous timer value

In timer mode **first** separator show DD:HH:MM / HH:MM:SS time format, **second** separator show on/off alarm.

For set countdown timer push **2 button** for 1 sec. You will enter in timer setup mode and you will see:

Days : Hours : Months


00 : 00 : 00

Use **1 button** for increase value and **3 button** for decrease value. Push **2 button** for change position. For set seconds you will see next format:

__ :SS: __

1 _ :00: _ 1

Press and hold Button 3 and then press Button1

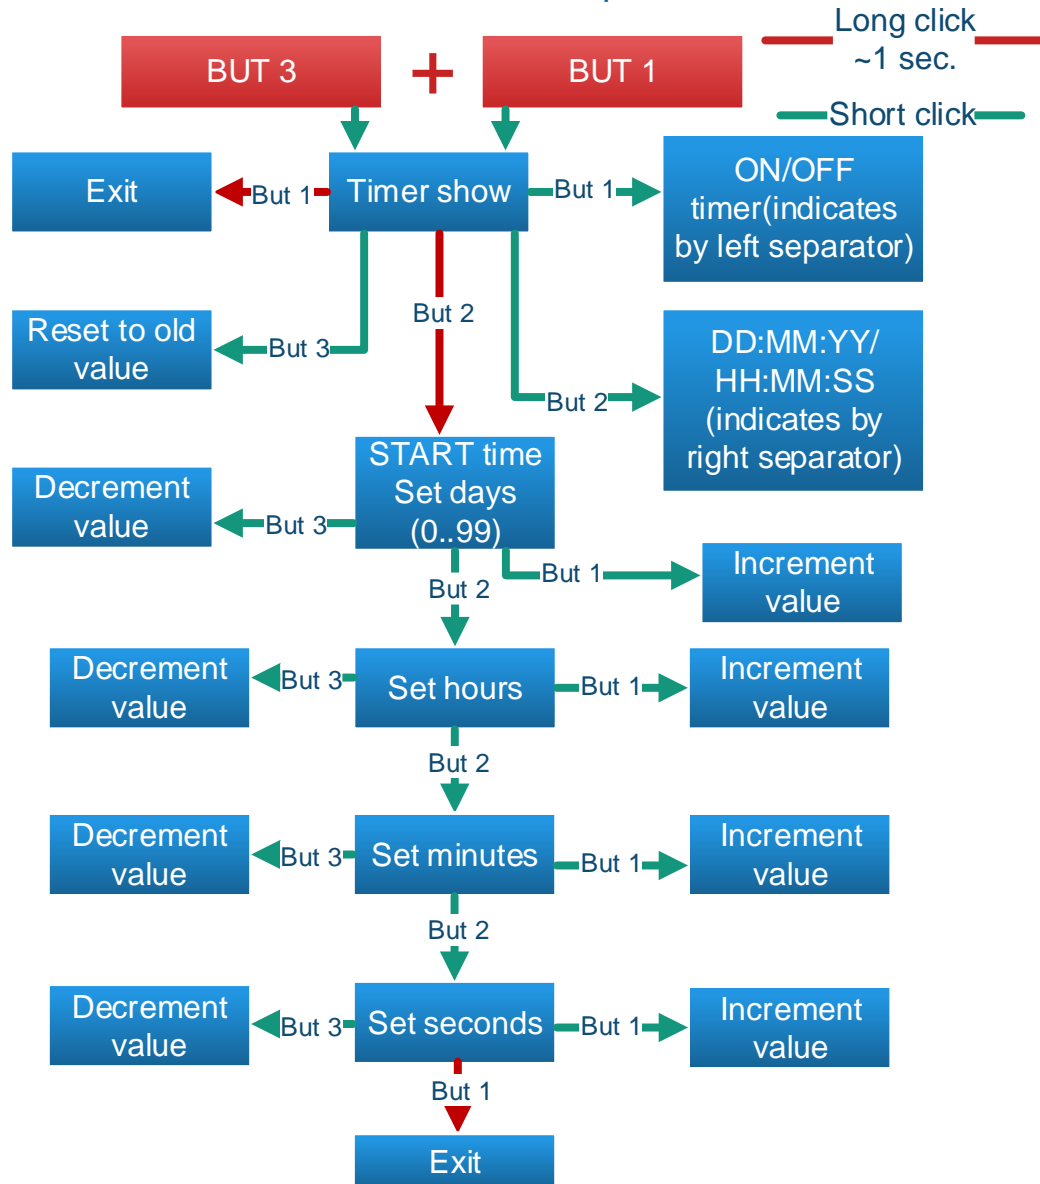


Remote control in timer mode

Button	Action
OK	On/off timer
▶	DD:HH:MM / HH:MM:SS
◀	Reset to previous timer value
1	Timer setup
7	Exit

How to make HARD RESET if something wrong?

When your clock starts, you hear short melody. If you will press 1 button for 1-2 second in this moment, clock will reset all your setting. You will hear p-i-i-i-i-i-p p-i-p p-i-p. That's mean HARD RESET is done.

How to set night fading?

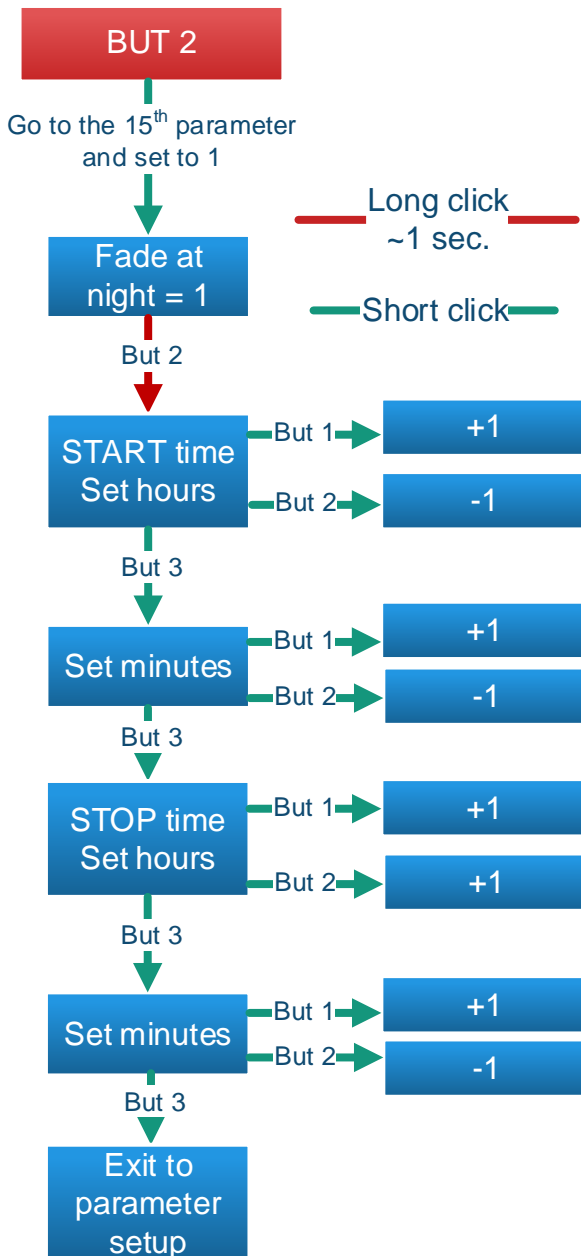

Set 15th parameter to 1 and press **2 button** for ~1sec and you will enter into setup. You will hear b-i-i-i-p and will see:

00 : __ : __

Now, you need set time of START fading. Use **1** and **2 button** for increase/decrease value and **3 button** for change digit. After that, you need to set time of STOP fading similarly.

Example: you go to sleep at 11:10PM and get up 6:30AM. So, you need to set START time as 23:10 and STOP time as 6:30.


How to use remote control?

Button	Action
OK	Enter/exit in parameters mode
◀ ▶	Next effect of switch time
▲ ▼	Change value
1	Time setup
2	Alarm setup
3	Date setup
4	Show temperature
5	Show date

6	On/off alarm
7	Countdown timer setup
8	Turn off LEDs and tubes
9	Brightness of bottom LEDs
*	Change brightness of top LEDs
#	Change color of top LEDs




- Use ◀ ▶ for change position in setup modes
- For change value you can use ▲ ▼ or use any number buttons




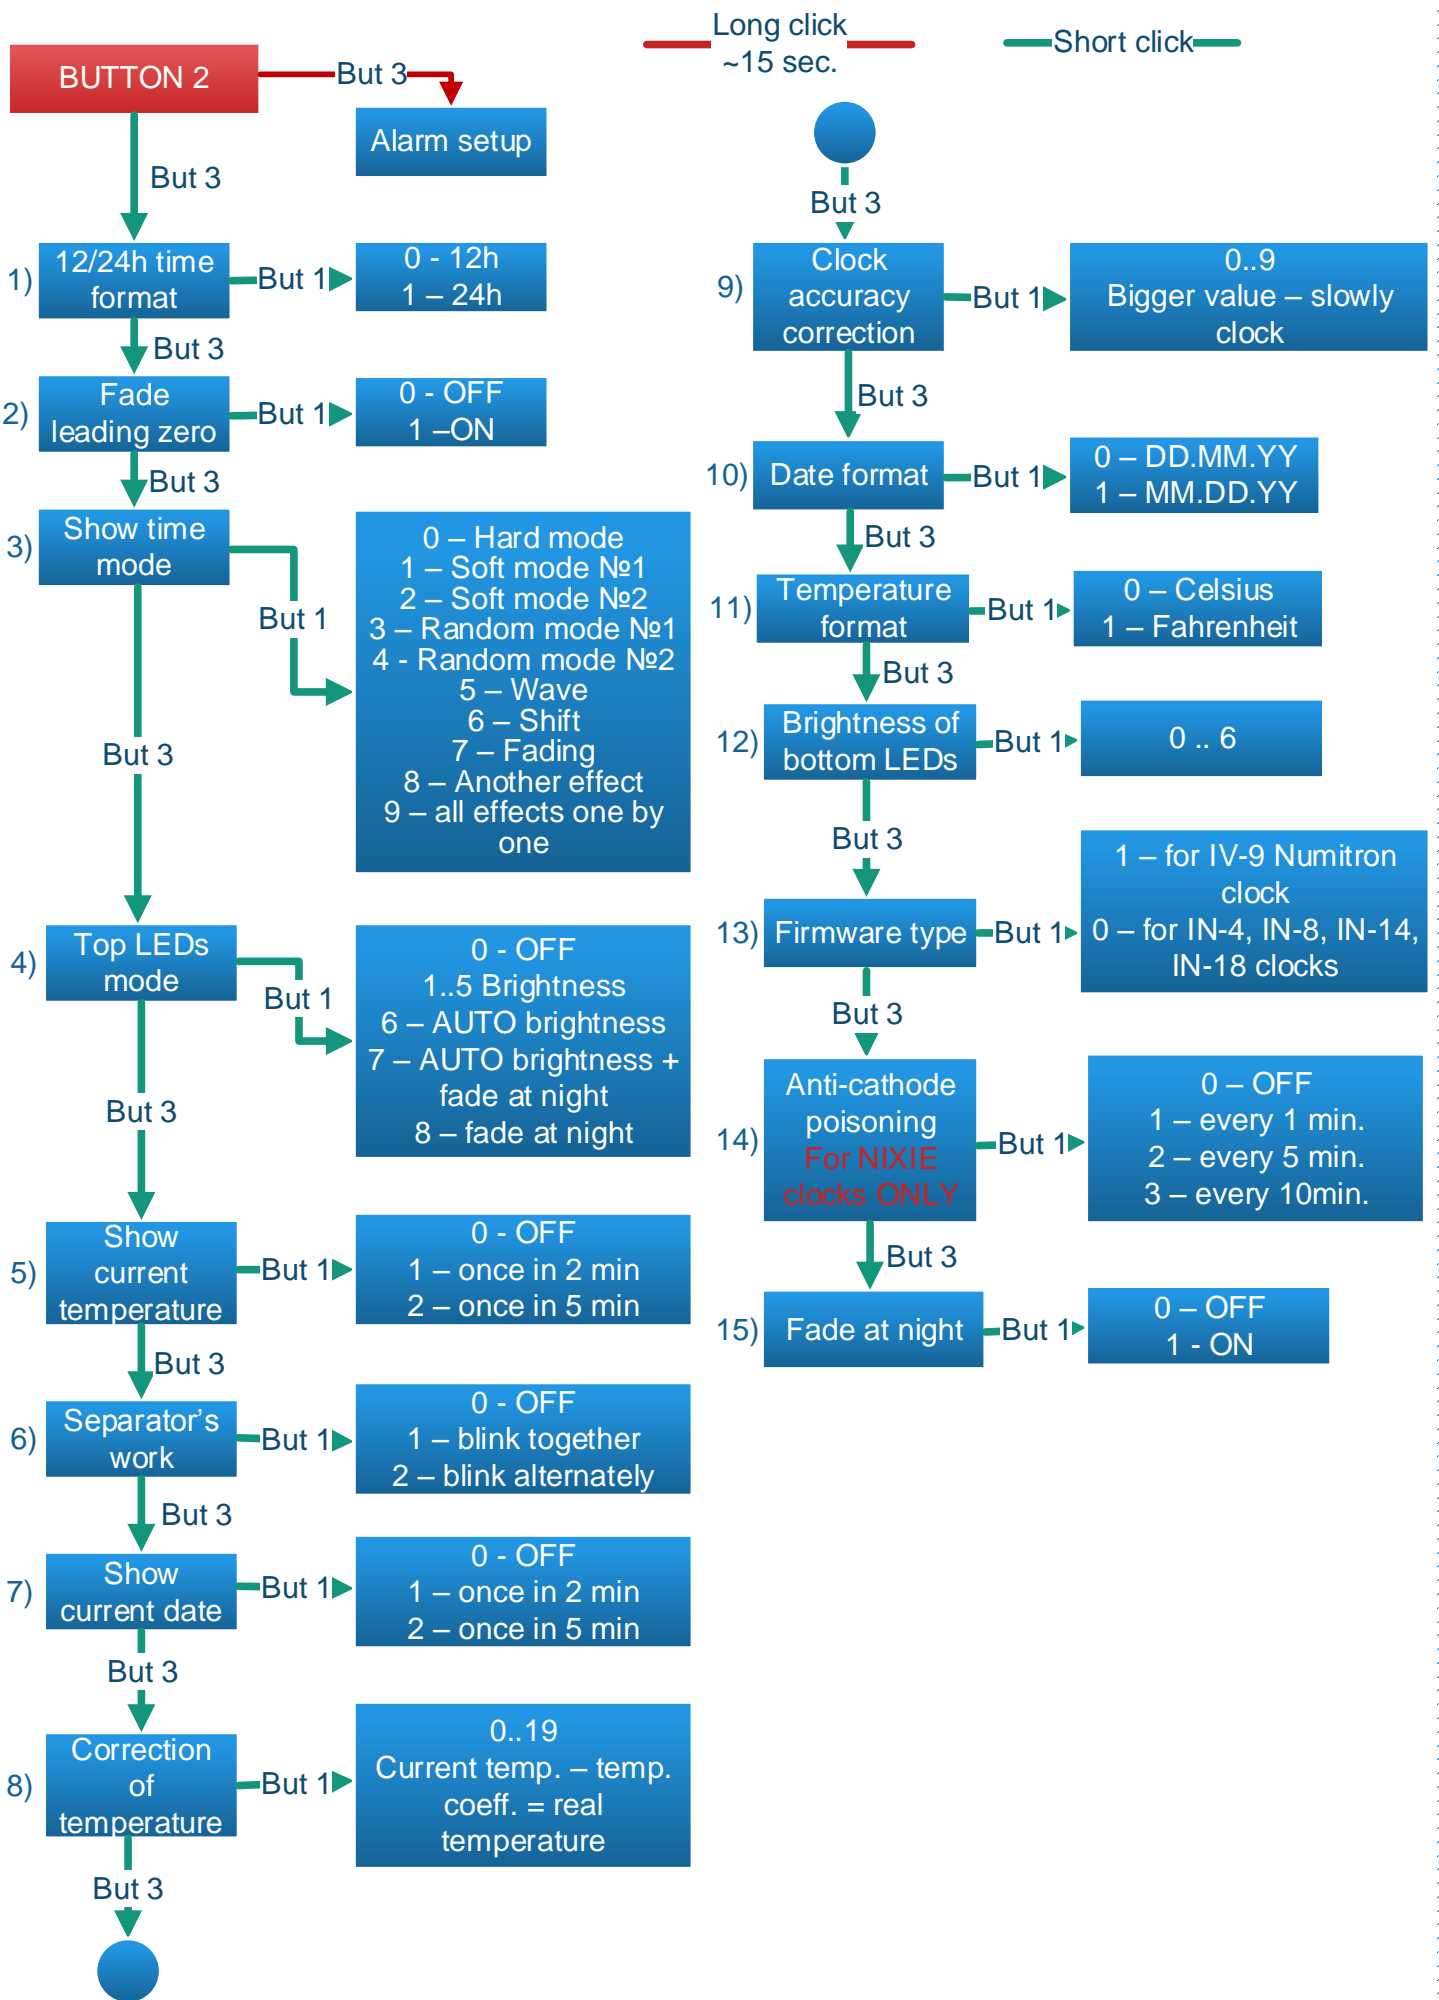

Long click
~1 sec.

Short click

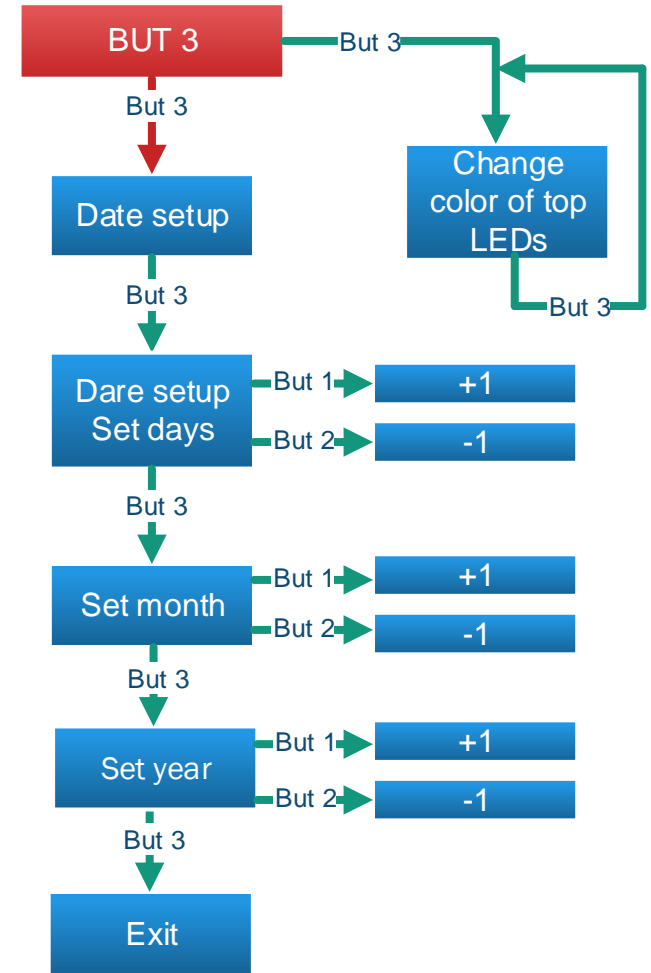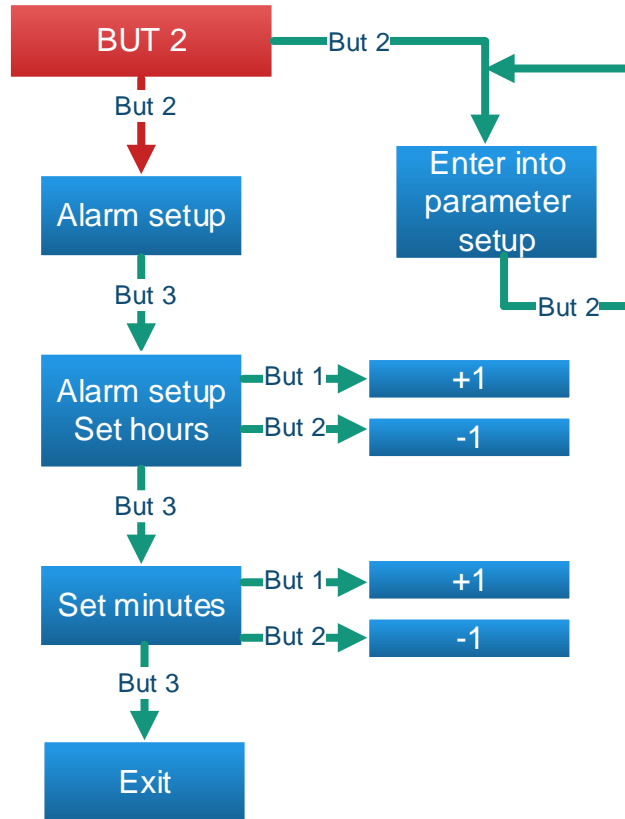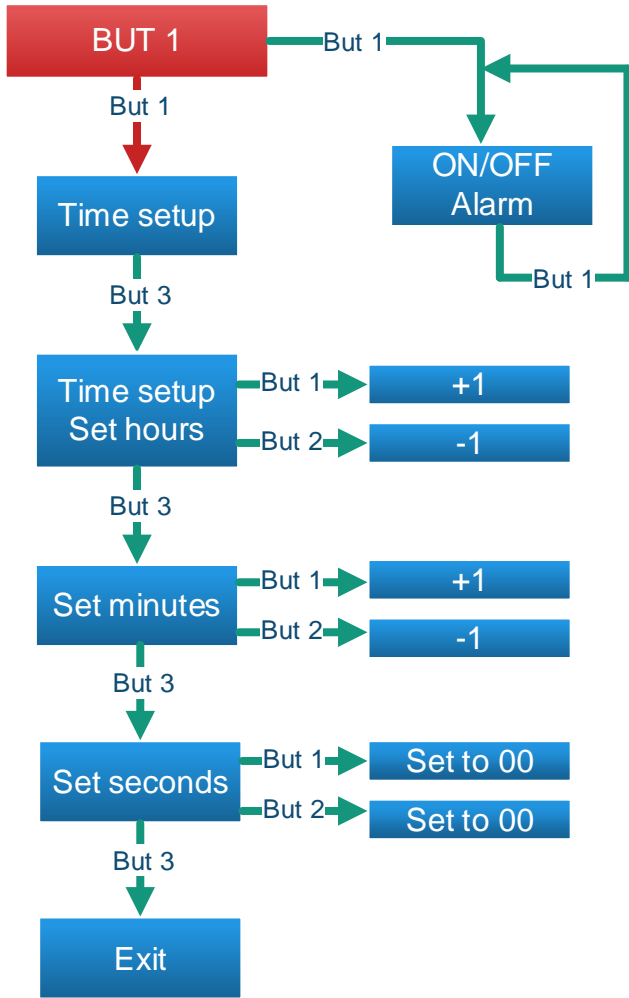

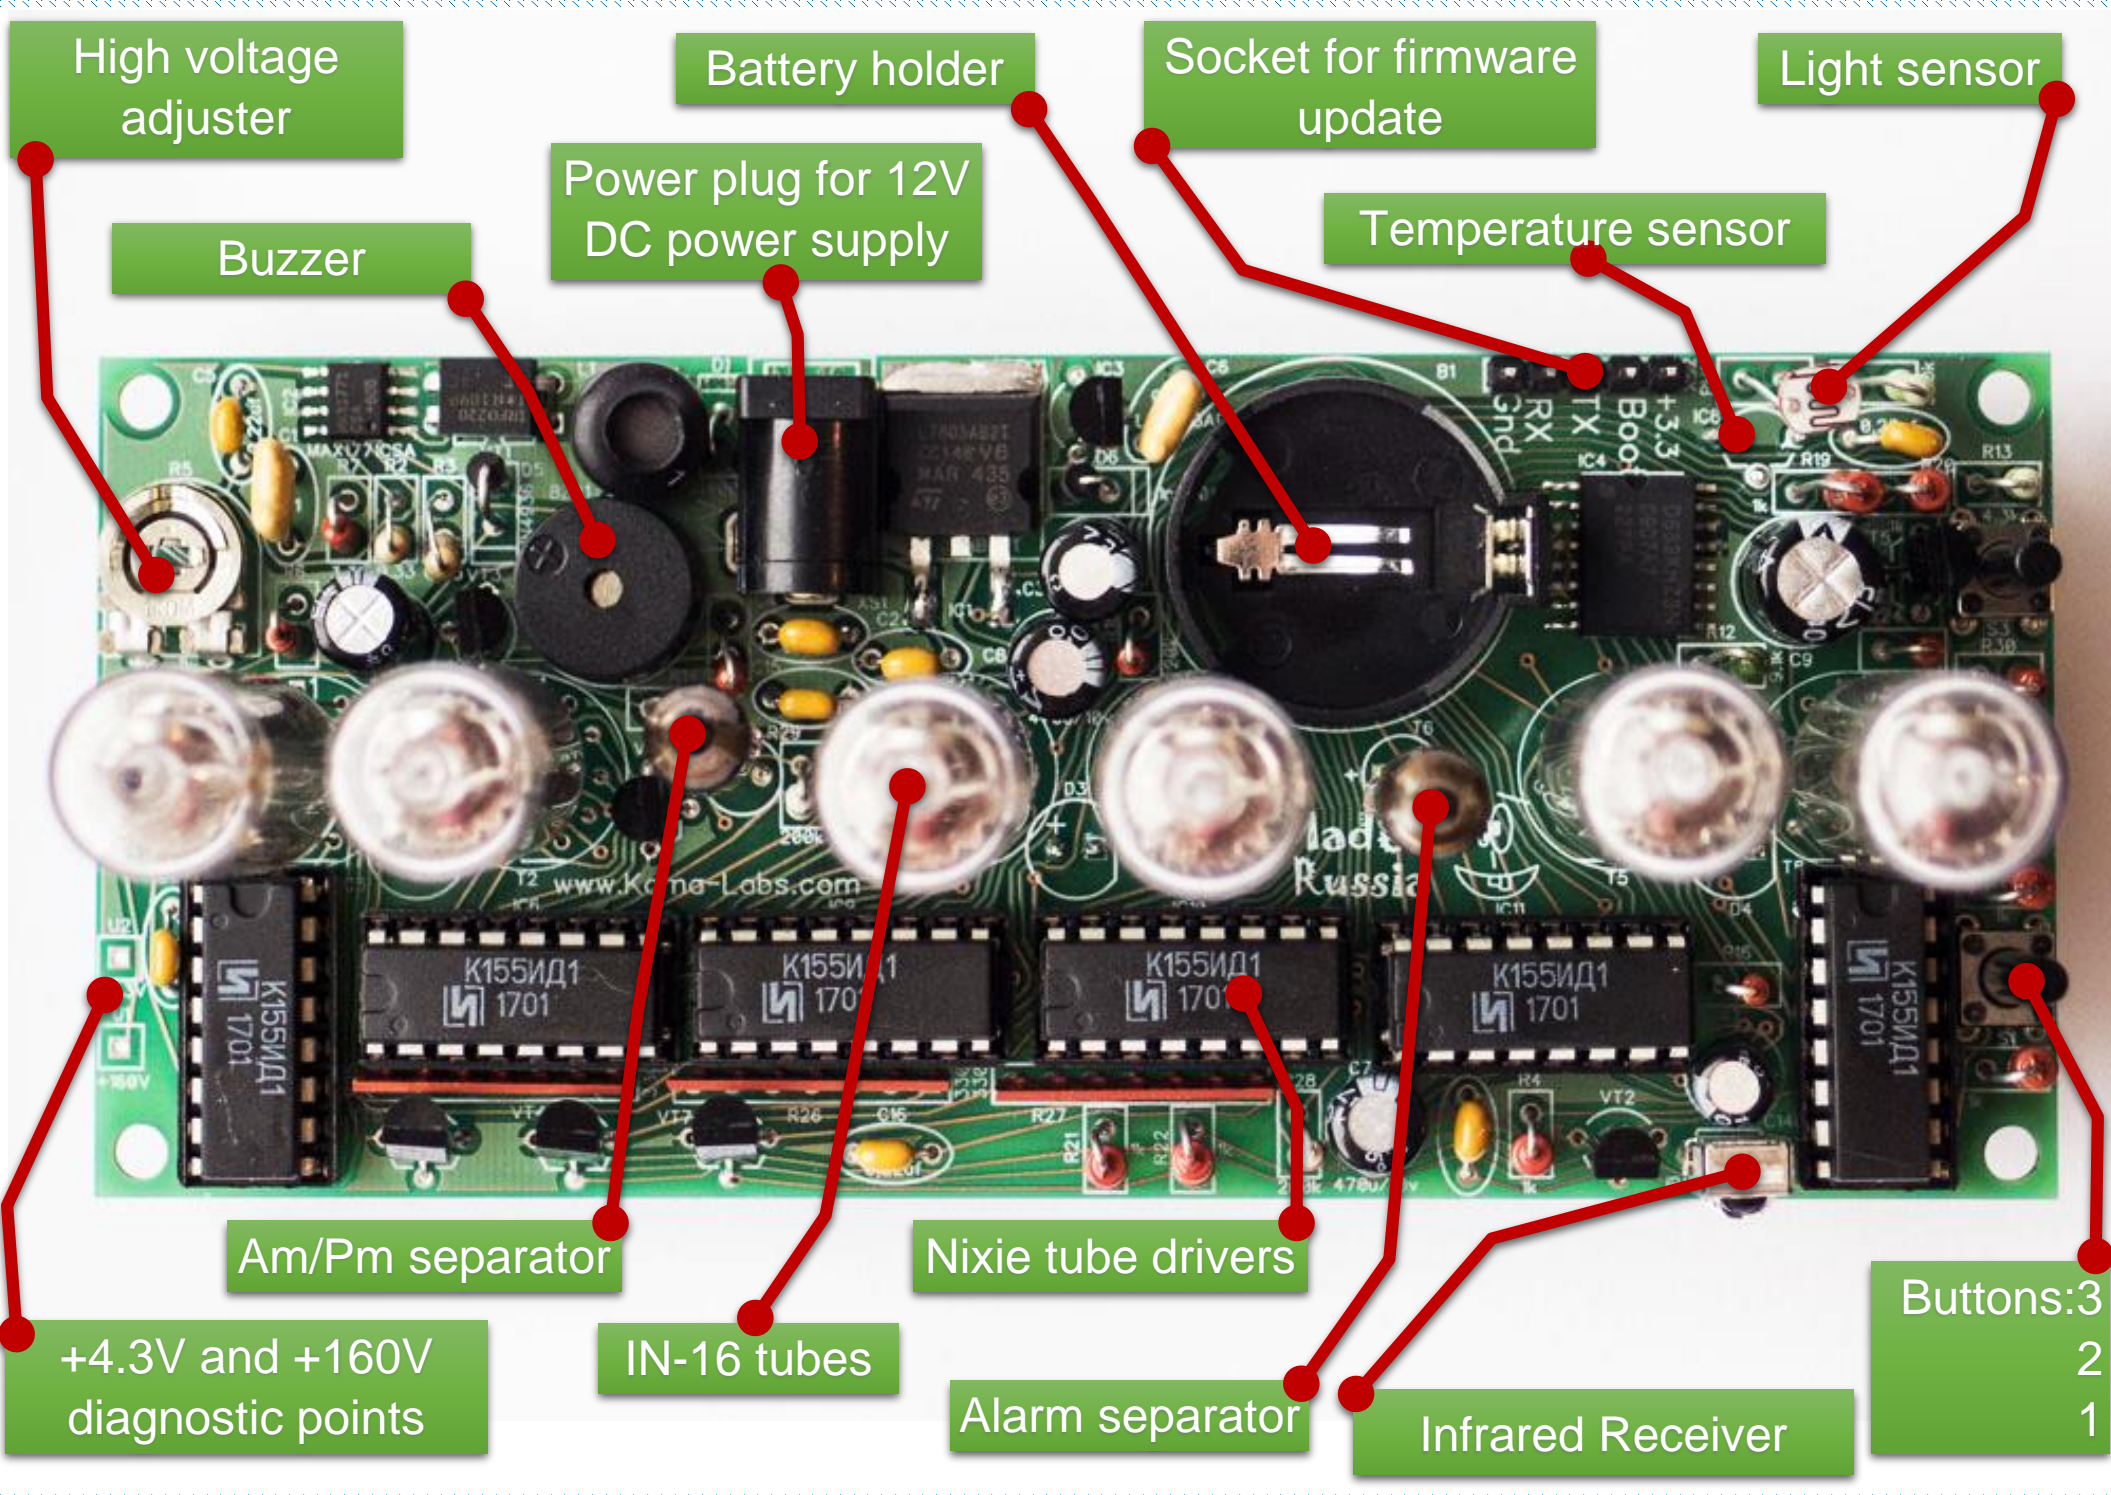

High voltage adjuster

Battery holder

Socket for firmware update

Light sensor

Buzzer

Power plug for 12V DC power supply

Temperature sensor

Am/Pm separator

Nixie tube drivers

Buttons: 3
2
1

+4.3V and +160V diagnostic points

IN-16 tubes

Alarm separator

Infrared Receiver